

JAMBS FOR UNICO SD - (100/125/150MM THICKNESS)




JAMBS THICKNESS FOR GLASS

		100	125	150
A	X	32	43	54
	Y	48	48	48
B	X	32	43	54
	Y	25	25	25
C	X	100	125	150
	Y	25	25	25


JAMBS THICKNESS FOR TIMBER

		100	125	150
A	X	19	31	43,5
	Y	50	50	50
B	X	19	31	43,5
	Y	25	25	25
C	X	100	125	150
	Y	25	25	25

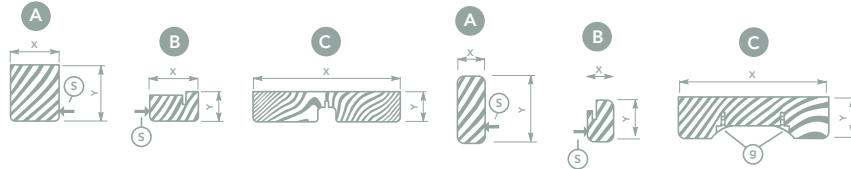

- A: Crosspiece 2150mm to be cut on site to desired length
- B: Uprights easily inserted into the frame attachments
- C: Stop jambs connected with Eclisse "St" brackets
- g: Stop seals
- s: Dust-stop profile


JAMBS FOR UNICO DD - (100/125/150MM THICKNESS)



- A: Crosspiece 2150mm to be cut on site to desired length
- B: Uprights easily inserted into the frame attachments
- s: Dust-stop profile

JAMBS THICKNESS FOR TIMBER

		100	125	150
A	X	19	31	43,5
	Y	50	50	50
B	X	19	31	43,5
	Y	25	25	25



STANDARD & BESPOKE DESIGNS

- A full range of standard ironmongery is available for the Em-B Eclisse
- Bespoke ironmongery is also available for the system, this service allows you to customise the ironmongery for your project
- Always specify door thickness when ordering ironmongery